

Vectra SX
Liquid Ring Vacuum Pumps and Compressors



NASH Vectra SX Vacuum Pumps & Compressors

A Higher Standard in Liquid Ring Pumps

NASH liquid ring pumps produced by Gardner Denver have been setting the standard in performance and reliability for over 100 years. That standard has been redefined with the Vectra SX line of small industrial vacuum pumps.


The Vectra SX series has taken the legendary NASH standard for quality and applied it to smaller equipment sizes. These pumps have been created to excel in a wide range of demanding industrial applications. Gardner Denver Nash has employed advanced design techniques such as solid modeling, finite element analysis and computational fluid dynamics, along with decades of experience, to develop a product line that delivers superior value to our customers. The result is industry leading performance, lower operating costs, and application specific configurations that target the varied requirements of demanding industrial processes.

Basic Specifications	
Vacuum range	0-29 in Hg vac to 33 mbar abs.
Mechanical seal	Single
Compressor pressure	0 - 20 psig to 2.3 bar abs. standard
Construction material	<ul style="list-style-type: none"> • Cast Iron with precision cast 316SS Rotor & SS lined body • All precision cast 316 SS


Features	Benefits
Efficient design	Lower operating costs
Global product design	Suitable for 50 & 60 Hz operation
One moving part	Long term reliability
Variable port design	High efficiency
Nash patented gas scavenging	Increased high vacuum performance
Nash patented stainless steel liner	Improved corrosion resistance
Application specific versions	Improved performance & reliability
Quiet operation	Improved work environment/safety
Built-in mechanical seal	No shaft leakage
Commercial motors used	Wider range of product configurations
100% performance tested	Trouble-free start-up and operation
Backed by a 2 year warranty and over 100 years of experience	Peace of Mind

Reliable Technology for Demanding Industrial Processes

Vectra SX vacuum pumps and compressors provide lower life cycle costs and greater overall value to our customers. Operating speeds have been carefully selected to ensure minimal wear, high efficiency and a long operating lifespan. Utility costs are kept to a minimum due to low water flow requirements and low power consumption. The Vectra SX has been designed so that the motor does not operate in the service factor, further extending pump life. It includes high quality components such as a precision cast 316 stainless steel rotor that is standard on all units. The cast iron pump includes a **patented stainless steel liner** to reduce internal corrosion and maintain peak operating performance. A **patented gas scavenging feature** has also been employed to provide superior performance and longevity at high vacuum levels.


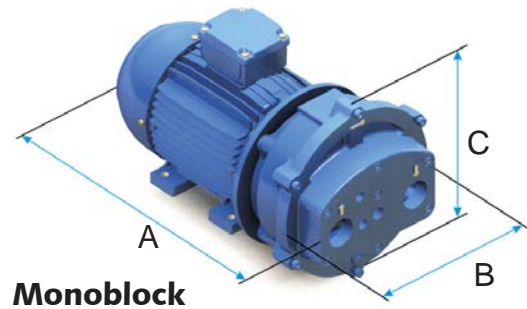


Monoblock

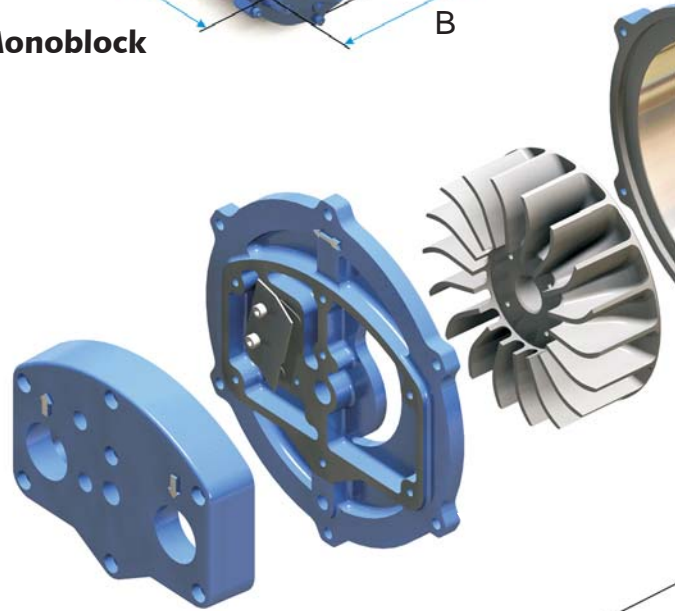


World Class Design & Performance

Performance*

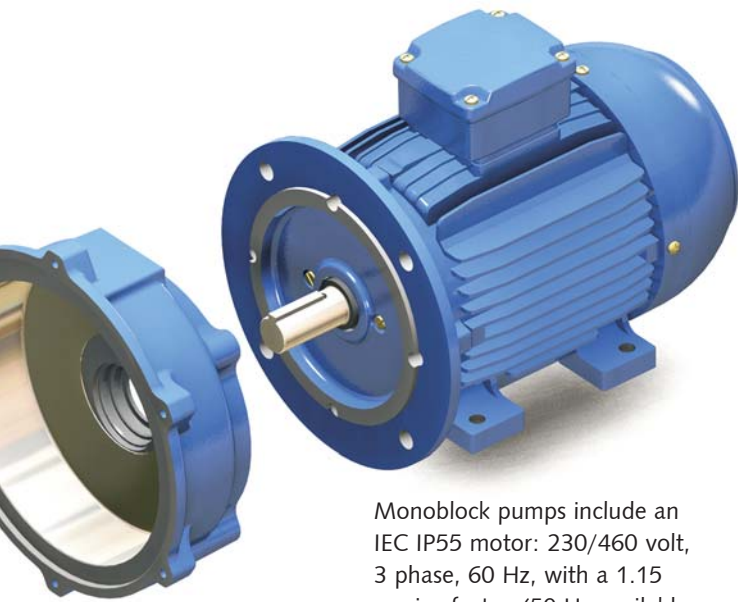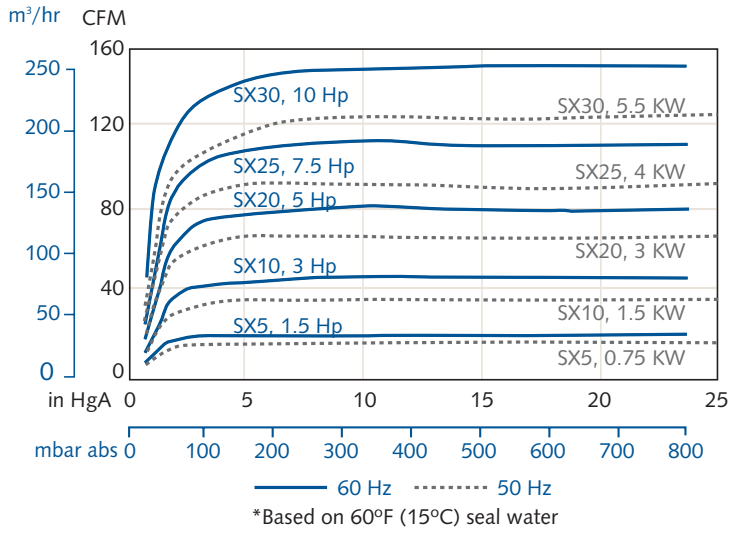

Monoblock pumps include an IEC IP55 motor: 230/460 volt, 3 phase, 60 Hz, with a 1.15 service factor. (50 Hz available upon request.)

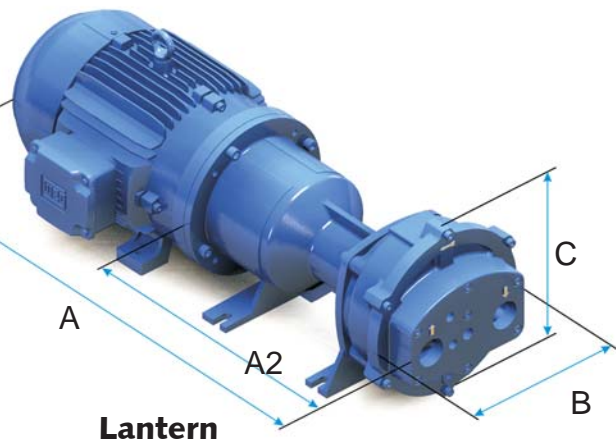

Lantern

Application Specific Variations

Variation	Applications
High Vacuum	Central vacuum systems Deaeration/Degassification Distillation Drying Evaporation Impregnation Autoclaves/Sterilization Vapor recovery Vent gas removal Laboratory vacuum Priming
Water Handling	Extrusion Evisceration Filling Filtration Vacuum conveyance Dairy Soil remediation
Compressor	Wastewater treatment Digester gas Aeration Gas boosting

Dimensions - Monoblock inches (mm in blue)

Model	Length A	Width B	Height C
SX5	15 381	8 200	9 232
SX10	20 495	11 267	12 306
SX20	22 556	11 267	12 313
SX25	25 639	13 324	14 364
SX30	27 696	13 324	14 364

Dimensions - Lantern inches (mm in blue)

Model	Length w/motor - A	Length no motor - A2	Width B	Height C
SX5	30 761	16 414	9 224	8 205
SX10	33 833	19 492	13 318	12 300
SX20	37 933	20 510	13 318	12 300
SX25	40 1013	24 602	16 394	14 347
SX30	41 1029	24 611	14 367	14 347

All dimensions are approximate

Other NASH Products

TC/TCM

Integral 2 stage liquid ring pumps with improved performance at vacuum levels down to 0.8" HgA (27 mbar)
Designed to handle large amounts of liquid carryover without difficulty
Capacity of 100 to 2,240 CFM with vacuum to 0.8" HgA
Capacity of 170 to 3,740 m³/h with vacuum to 27 mbar abs



Steam Jet Ejectors

Sizes range from one-inch (25mm) to 78-inch (2 meters) inlets
Capacities range from 20 CFM to 20,000 CFM
Capacities range from 34 m³/h to 34,000 m³/h
Multi-stage system pressures as low as 0.001 mm HgA



2BE3/P2620

Large liquid ring vacuum pumps with superior corrosion resistance
Top discharge capability which eliminates need for trench
Self-recirculating seal water, reducing need for external seal water source
Capacity of 4,000 to 23,000 CFM with vacuum to 24" HgV
Capacity of 6,800 to 39,000 m³/h with vacuum to 200 mbar abs



Service

We have the know-how, the expertise and the specialists. We provide professional service to make your pumps run for decades. Our service centers are located in:

- Australia
- Brazil
- China
- France
- Germany
- Korea
- Netherlands
- Singapore
- South Africa
- Sweden
- UK
- USA



Compressors

Wide range of liquid ring compressors designed for many applications. Rugged and reliable, they can handle highly toxic, explosive and corrosive gases
Specifically developed for applications such as flare-gas, Chlorine and Vinyl Chlorine Monomer (VCM) recovery
Capacity of 60 to 2,200 SCFM with pressure to 200 PSIG
Capacity of 100 to 3,740 m³/h with pressure to 15 bar abs
Single and two stage models available



NASH

A Div. of Gardner Denver

9 Trefoil Drive
Trumbull, CT 06611 U.S.A.

phone: 800 553 NASH

+1 203 459 3900

fax: +1 203 459 3988

nash@gardnerdenver.com

www.GDNash.com

NASH

A Gardner Denver Product